

(12) **United States Patent**
Nixon et al.

(10) **Patent No.:** **US 6,429,036 B1**
(45) **Date of Patent:** **Aug. 6, 2002**

(54) **BACKSIDE ILLUMINATION OF CMOS IMAGE SENSOR**

(75) Inventors: **Robert Nixon**, Pasadena; **Nicholas Doudoumopoulos**, Marin del Rey; **Eric R. Fossum**, La Crescenta, all of CA (US)

(73) Assignee: **Micron Technology, Inc.**, Boise, ID (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/483,362**

(22) Filed: **Jan. 14, 2000**

Related U.S. Application Data

(60) Provisional application No. 60/116,144, filed on Jan. 14, 1999.

(51) **Int. Cl.⁷** **H01L 21/00**

(52) **U.S. Cl.** **438/57; 438/458; 438/460**

(58) **Field of Search** 438/108, 125, 438/455, 408, 66, 67, 459, 460, 57, 60

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,753,537 A * 5/1988 Dekker et al. 438/113


* cited by examiner

Primary Examiner—John F. Niebling
Assistant Examiner—Christopher Lattin
(74) *Attorney, Agent, or Firm*—Fish & Richardson P.C.

(57) **ABSTRACT**

A CMOS image sensor die is fabricated and packaged to allow the light sensitive area of the die to be illuminated from either the front side or the backside, or both. The implementation is achieved using wafer level processing that facilitates photon collection at both surfaces. This approach permits processing apt the wafer level to allow the deposition of color filter arrays (CFA) on either surface. The silicon is thinned and the bump contacts and interconnect lines are relocated away from the image area of the die. The die is covered with an optically transparent material to provide additional support.

11 Claims, 3 Drawing Sheets

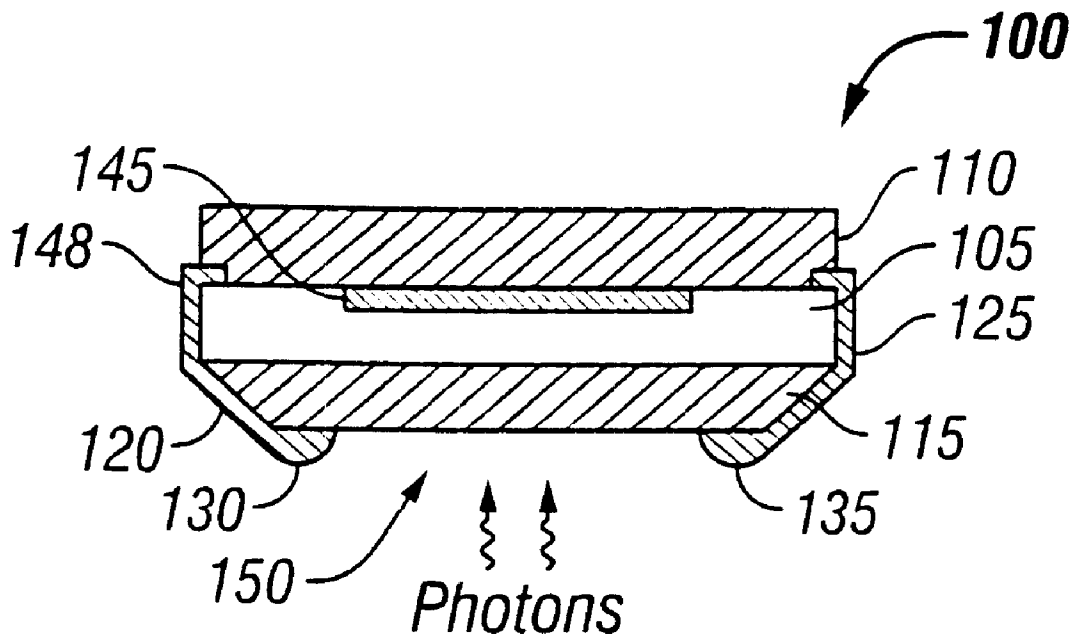

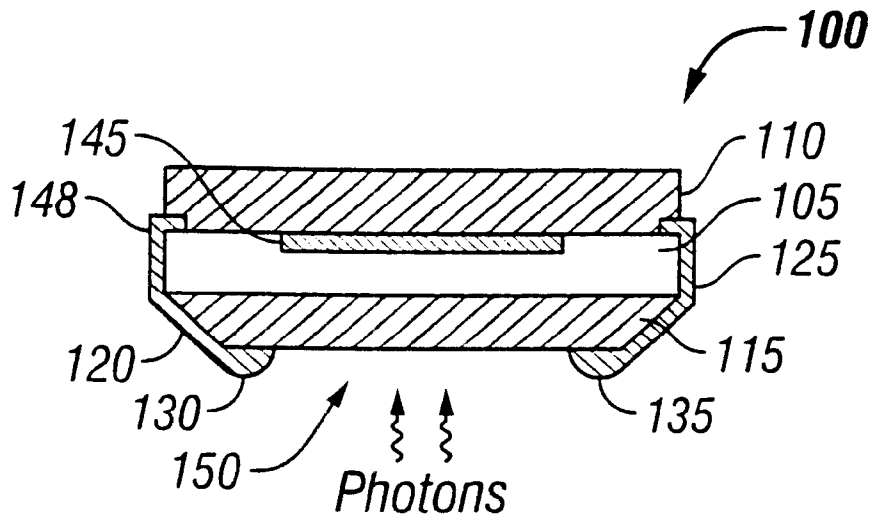


FIG. 1

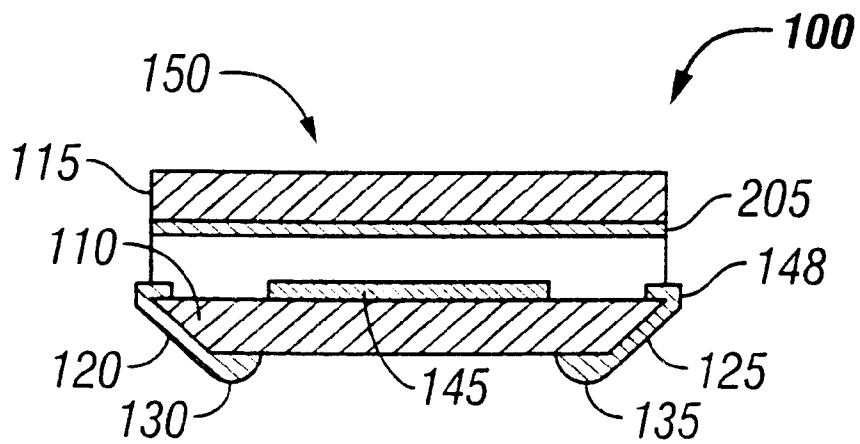


FIG. 2

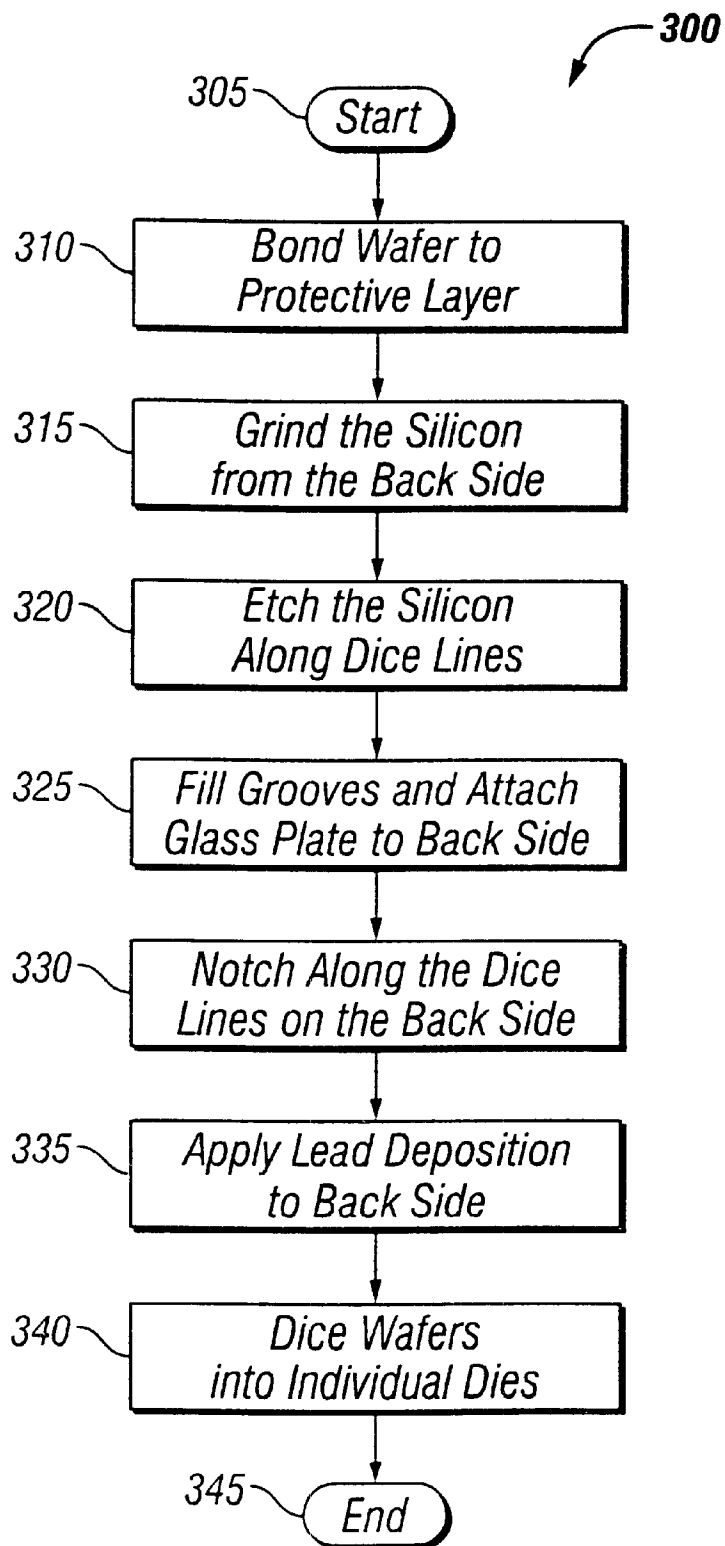


FIG. 3

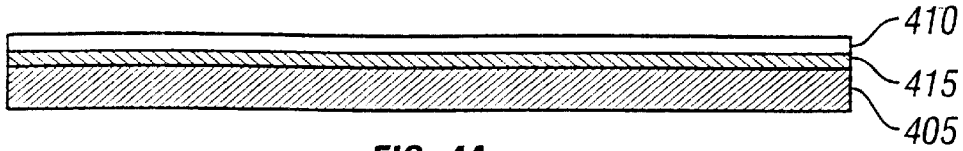


FIG. 4A

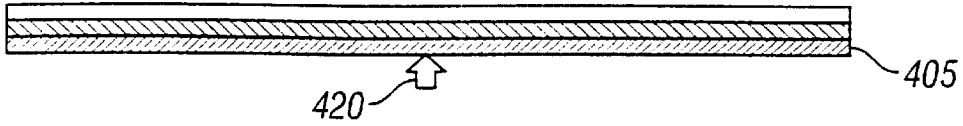


FIG. 4B

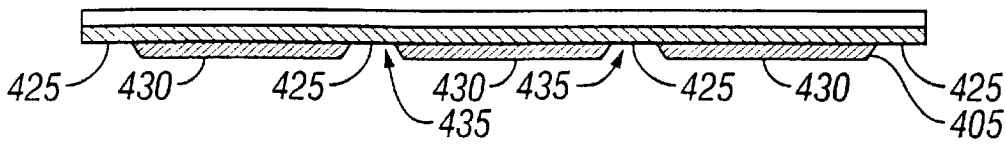


FIG. 4C

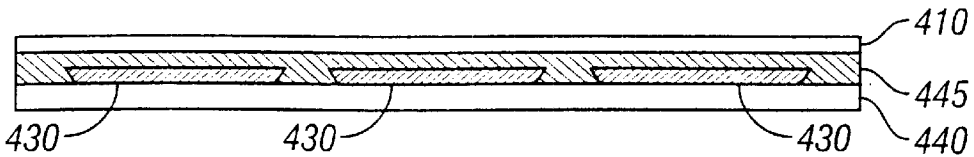


FIG. 4D

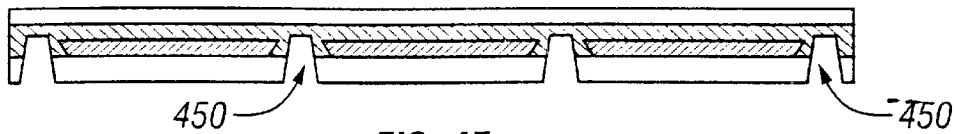


FIG. 4E

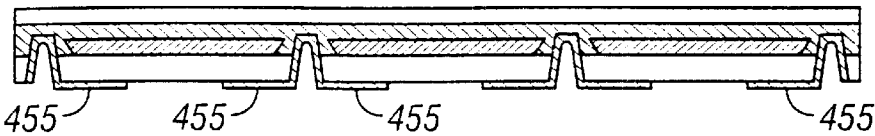


FIG. 4F

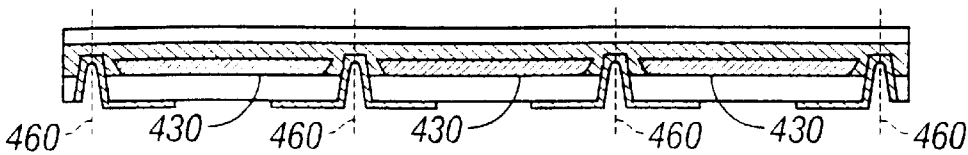


FIG. 4G

BACKSIDE ILLUMINATION OF CMOS IMAGE SENSOR

TECHNICAL FIELD

This application claims benefit of U.S. Provisional application No. 60/116,144, filed Jan. 14, 1999.

This invention relates to image sensors, and more particularly to the manufacturing of CMOS image sensors capable of backside illumination.

BACKGROUND

Typically, a CMOS image sensor is illuminated from the front (or top) side of the silicon die. Because of processing features (metallization, polysilicon, diffusions, etc.), the pixel area is partially obscured, resulting in a loss of photons reaching the sensitive area and a reduction in the area in which photons are effectively collected. This results in a reduction of the overall sensitivity of the sensor. If photons were collected from the backside of the pixel area, these obstacles could be overcome.

However, backside illumination can be difficult because of the thickness of the bulk silicon and the packaging technology that allow the backside to be exposed to the illumination source. The thickness of a typical silicon wafer needs to be thinned considerably in order to absorb the photons in the sensitive area. Prior approaches utilized methods for thinning the die after they have been scribed from a wafer and then packaging the die in specialized packages. The specialized packages provide support to the thin die while providing unobstructed ports for illumination from the backside. However, this approach is both costly and time consuming.

SUMMARY

A CMOS image sensor is fabricated and packaged to allow the light sensitive area of the die to be illuminated from either the front side or the back side, or both. The implementation is achieved using wafer level processing that facilitates photon collection at both surfaces. This approach permits processing at the wafer level to allow the deposition of color filter arrays (CFA) on either surface. The silicon is thinned and the bump contacts and interconnect lines are relocated away from the image area of the die. The die is covered with an optically transparent material to provide additional support.

DESCRIPTION OF DRAWINGS

These and other features and advantages of the invention will become more apparent upon reading the following detailed description and upon reference to the accompanying drawings.

FIG. 1 illustrates an image sensor according to the present invention.

FIG. 2 illustrates an image sensor including a color filter array according to the present invention.

FIG. 3 is a flowchart illustrating the process to form an image sensor according to the present invention.

FIGS. 4A-4G illustrates the image sensor in various stages of formation according to the process of FIG. 3.

DETAILED DESCRIPTION

A CMOS image sensor **100** according to the present invention is illustrated in FIG. 1. The image sensor **100** is packaged at the wafer level using semiconductor manufac-

turing processes. The image sensor includes a thin silicon substrate **105** which is sandwiched between two thin protective plates **110**, **115** on the top and bottom sides. An epoxy adhesive layer (not shown) attaches the protective plates **110**, **115** to the silicon substrate **105** and surrounds and protects the edges of the silicon **105**. Electrical leads **120**, **125** connect to pads **130**, **135** of the sensor die by a non-bonding technique. Pixels **145** are positioned at the top surface **148** of the silicon substrate **105**. The image sensor **100** is light sensitive along a back side **150**.

The image sensor **100** of the present invention may be contained in either perimeter or area array leaded configurations. The solderable leads have pitches down to 0.5 mm in the peripheral configuration and 0.8 mm in the area array configuration.

FIG. 2 illustrates the image sensor **100** of FIG. 1 modified to include a color filter array (CFA) **205**. The CFA **205** allows the image sensor **100** to achieve color imaging. The CFA **205** is deposited on the bottom protective plate **115** of the image sensor **100**. When a CFA **205** is used, the electrical leads **120**, **125** and pads **130**, **135** are moved to the top surface **148** of the image sensor **100**.

The process **300** for manufacturing image sensors **100** according to the present invention is illustrated in FIG. 3, with the image sensors **100** at each stage of the process being shown in FIGS. 4A-4G. The process begins at a start state **305**. Proceeding to state **310**, a silicon wafer **405** is bonded onto a thin protective layer, or first glass plate **410** as seen in FIG. 4A. The first glass plate **410** is bonded while the active surface of the silicon wafer is facing up into the encapsulate. The first glass plate **410** may be coated with a filter layer **415** as will be discussed below. If a filter layer **415** is used, the glass plate **410** is bonded to the silicon wafer **405** such that the side of the glass plate **410** containing the filter layer **415** faces the active surface of the silicon wafer **405**.

Proceeding to state **315**, if the silicon wafer **405** is thicker than desired, the silicon wafer **405** is ground to a predetermined thickness. In one embodiment of the invention, the silicon wafer **405** is ground to a thickness of approximately 70 microns. The silicon wafer **405** is ground from the back side of the wafer as shown by the arrow **420** in FIG. 4B.

Proceeding to state **320**, the silicon wafer **405** is now etched along the dice lines **425** as seen in FIG. 4C. By etching the silicon wafer **405**, the wafer is separated into individual dies **430** as seen in FIG. 4C. Of course, the desired size of each individual dies **430** determines the number of dies produced from each silicon wafer **405**.

Proceeding to state **325**, the grooves **435** between the individual dies **430** are filled and a second glass plate **440** is bonded onto the back side of the silicon dies as seen in FIG. 4D. The grooves are filled with an inert material **445**. The second glass plate **440** when combined with the first glass plate **410** creates a complete protective enclosure for each die **430**. Epoxy may be used to bond the second glass plate **440** to the silicon dies **430**, and the epoxy may fill the grooves **435** between the dies **430**.

Proceeding to state **330**, deep notches **450** are drawn between the dies **430** as shown in FIG. 4E. By drawing deep notches **450** between the dies **430**, the cross sections of each of the pads are exposed.

Proceeding to state **335**, a metal layer is deposited to contact each pad at its cross section as seen in FIG. 4F. The metal layer is patterned by a lithography process into individual leads **455** that contact the pads and form a soldering pad on the upper surface of each die package. Contacts may then be plated by either gold or lead-tin.

Proceeding to state **340**, the wafer is diced into individual packaged dies. The wafer is diced along score lines **460** within the notches **450** between the dies **430**. The multiple individual packaged dies **430** that comprise the wafer are shown in FIG. **4G**. The process **300** then terminates in end state **340**.

The image sensor packages assembled according to the present invention allows for the light sensitive area of the die **430** to be illuminated from either the front side or the back side, or both. The package also provides a true die size package with an extremely low thickness, typically in the range of approximately 0.6 mm to approximately 2.0 mm. Even at these thicknesses, the package offers a complete mechanical enclosure for the die and does not leave any silicon exposed to the outside. This provides both mechanical and environmental protection. The manufacturing process also results in lower cost, particularly for smaller dies.

Testing has shown image sensors according to the present invention have dimensional and assembly tolerances that are more sensitive than ordinary integrated circuit packaging. Table 1 compares the mechanical accuracies between an image sensor according to the present invention and two regular, mechanically assembled optical packages (packages A and B).

Mechanical Feature	Package A	Package B	Present Invention
Center Translation of effective image area (X,Y)	$\pm 150\mu$	$\pm 85\mu$	$\pm 35\mu$
Rotation angle of effective image area (in focal plane)	$< \pm 1$	$< \pm 0.25$	$< \pm 0.01$
Tilt of effective image area (z-axis)	$< 60\mu$	$< \pm 25\mu$	$< 10\mu$
Thickness of cover glass	0.75 mm	0.55 mm	> 0.4 to 1 mm
Self Centering	No	No	Yes

As shown in Table 1, another advantage of the present invention is a "self-centering" phenomenon that occurs during solder reflow. When the image sensor **100** is placed on a pad with solder paste, exact placement is not required. The surface tension of the molten solder drives the image sensor to align itself to the exact placement in relation to the pads and trace patterns on the board. In addition to alignment in the lateral direction, there is also vertical alignment. The vertical alignment compensates for some of the warpage and irregularities that may be seen in the board, thereby improving and simplifying the accurate assemble of the image sensor.

As described above, a color filter array (CFA) **205** may be added to the image sensor **100** of the present invention. The CFA **205** may be, for example, a coated filter for infra-red (IR) blocking or an absorption filter for IR blocking. The IR blocking filters compensates for the different spectral response of the silicon detector and the human retina. The

silicon detects ultra violet and infra-red in ranges beyond the visual range. However, the spectral response in the visible spectra is different for the eye and the silicon detector.

The CFAs **205** correct the silicon detection response to match the eye response. These filters are commercially available and are known in the art. The filters may be of an interference type, a thin film type, or an absorption type. By integrating the CFA **205** into the package, the filter plate area is minimized. This results in lower costs and reduction of the filter size required.

Numerous variations and modifications of the invention will become readily apparent to those skilled in the art. Accordingly, the invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The detailed embodiment is to be considered in all respects only as illustrative and not restrictive and the scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. A method of manufacturing an image sensor comprising:
 - attaching a first cover layer to an active surface of a silicon wafer;
 - attaching a second cover layer to an opposite surface of the silicon wafer;
 - notching the silicon wafer along the second cover layer; and
 - forming electrical interconnections on the notched surface of the silicon wafer;
 wherein the image sensor is light sensitive from a back side.
2. The method of claim 1, wherein the electrical interconnections comprise bump contacts.
3. The method of claim 1, wherein the electrical interconnections comprise interconnect lines.
4. The method of claim 1, wherein the electrical interconnections are formed away from the active surface of the silicon wafer.
5. The method of claim 1, further comprising the steps of:
 - grinding the silicon wafer from the opposite surface of the silicon wafer; and
 - dicing the wafer into individual dies.
6. The method of claim 5, wherein the individual dies have a thickness in the range of approximately 0.6 mm to approximately 2.0 mm.
7. The method of claim 1, further comprising coating the second glass surface with a color filter layer.
8. The method of claim 7, wherein the filter layer is a color filter array.
9. The method of claim 8, wherein the electrical interconnections are formed on the first glass surface.
10. The method of claim 1, wherein the image sensor is light sensitive from a front side.
11. The method of claim 1, wherein the electrical interconnections are located outside an image area.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,429,036 B1

Page 1 of 1

DATED : August 6, 2002

INVENTOR(S) : Robert Nixon, Nicholas A. Doudoumopoulos and Eric R. Fossum, Ph.D.

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title page,

Item [75], Inventors, "**Eric Doudoumopoulos**" city and state, replace "Marin del Rey" with -- Marina del Rey --.


Item [57], **ABSTRACT**,

Line 6, replace "apt" with -- at --.

Signed and Sealed this

Twenty-sixth Day of November, 2002

Attest:

A handwritten signature in black ink, appearing to read "James E. Rogan", with a horizontal line drawn underneath it.

Attesting Officer

JAMES E. ROGAN
Director of the United States Patent and Trademark Office